

TECHNYL®

TECHNYL® A 218 V50 BLACK 21N

TECHNICAL DATA SHEET

Revised: December, 2016

TECHNYL® A 218 V50 Black 21N is a polyamide 66, reinforced with 50% of glass fibre, heat stabilized, for injection moulding. This grade offers an excellent combination between thermal and mechanical properties.

GENERAL

Material Status	• Commercial: Active
Availability	• Africa & Middle East • Asia Pacific • Europe • Latin America • North America
Filler / Reinforcement	• Glass Fiber, 50% Filler by Weight
Additive	• Heat Stabilizer
Key Benefits	• Good Flow • Heat Aging Resistance • Heat Stabilized (Inorganic) • Good Mold Release • High Stiffness
Applications	• Automotive applications • Bicycles component • Brackets • Consumer and Industrial applications • Engine mounts • Pedals • Structural parts
Certification/Compliance	• EC 1907/2006 (REACH) • UL QMFZ2
RoHS Compliance	• RoHS Compliant
Automotive Specifications	• GM GMW3038P-PA66-GF50H Color: 21N Black • GM GMW3038P-PA66-GF50J Color: 21N Black • IMDS ID 25761428 Color: 21N Black
Colors Available	• Black • Natural Color
Forms	• Pellets
Processing Method	• Injection Molding
Resin ID (ISO 1043)	• PA66-GF50

PROPERTIES

Typical values of properties are for Black grades

Physical	Dry	Conditioned Unit	Test Method
Molding Shrinkage			ISO 294-4
Across Flow	0.75	%	
Flow	0.25	%	
Water Absorption			ISO 62
23°C, 24 hr	0.60	%	
Saturation, 23°C	3.6	%	
Equilibrium, 23°C, 50% RH	1.4	%	
Density	1.55	g/cm ³	ISO 1183/A

Solvay Engineering Plastics

www.solvay.com - www.technyl.com

Tel: 00 800 55 400 600

technyl-emea@solvay.com - Europe, Middle East, Africa

technyl-apac@solvay.com - Asia Pacific

technyl-americas@solvay.com - Americas

Page: 1 of 5



SOLVAY

asking more from chemistry®

Mechanical	Dry	Conditioned	Unit	Test Method
Tensile Modulus (23°C)	16200	12500	MPa	ISO 527-2/1A
Tensile Strength				
Break, 23°C	220		MPa	ASTM D638
Break, 23°C	240	175	MPa	ISO 527-2/1A
Tensile Strain (Break, 23°C)	2.7	4.0	%	ISO 527-2
Flexural Modulus				
23°C	13800		MPa	ASTM D790
23°C	14500	10000	MPa	ISO 178
Flexural Strength (23°C)	320		MPa	ASTM D790
Charpy Notched Impact Strength (23°C)	14	18	kJ/m ²	ISO 179/1eA
Charpy Unnotched Impact Strength (23°C)	90	97	kJ/m ²	ISO 179/1eU
Notched Izod Impact				
23°C	180		J/m	ASTM D256
23°C	15	17	kJ/m ²	ISO 180
Thermal	Dry	Conditioned	Unit	Test Method
Heat Deflection Temperature				
0.45 MPa, Unannealed	260		°C	ISO 75-2/Bf
1.8 MPa, Unannealed	255		°C	ASTM D648 ISO 75-2/Af
Melting Temperature	262		°C	ISO 11357-3
Electrical	Dry	Conditioned	Unit	Test Method
Surface Resistivity	6.0E+14	1.0E+12	ohms	IEC 60093
Volume Resistivity	1.0E+15	1.0E+13	ohms-cm	IEC 60093
Electric Strength (2.00 mm)	35	30	kV/mm	IEC 60243-1
Relative Permittivity	3.70	4.00		IEC 60250
Dissipation Factor	0.010	0.11		IEC 60250
Comparative Tracking Index (Solution A)	600	600	V	IEC 60112
Flammability	Dry	Conditioned	Unit	Test Method
Flame Rating				UL 94
0.8 mm	HB			
1.6 mm	HB			
3.2 mm	HB			
Glow Wire Flammability Index				IEC
0.8 mm	650		°C	60695-2-12
1.6 mm	650		°C	
3.2 mm	700		°C	
Oxygen Index	23		%	ISO 4589-2

PROCESSING

Solvay Engineering Plastics

www.solvay.com - www.technyl.com

Tel: 00 800 55 400 600

technyl-emea@solvay.com - Europe, Middle East, Africa

technyl-apac@solvay.com - Asia Pacific

technyl-americas@solvay.com - Americas



SOLVAY

asking more from chemistry[®]

Injection	Dry Unit
Drying Temperature	80 °C
Suggested Max Moisture	0.20 %
Rear Temperature	270 to 280 °C
Middle Temperature	280 to 290 °C
Front Temperature	280 to 300 °C
Mold Temperature	70 to 100 °C

Injection Notes

The material is supplied in airtight bags, ready for use. In case that the virgin material has absorbed moisture, it must be dried with a dehumidified air drying equipment, dew point mini -20°C. Recommended time 2-4h

Injection Advice:

- For reinforced polyamide, Solvay recommends the use of steel with a high content of Carbon and purified for polishing to avoid or limit the abrasion. For example: X38CrMoV5-1 (EN Norm) - 1.2367 /1.2343 (DIN Norm) or X160CrMoV12 (EN Norm) - 1.2601 /1.2379 (DIN Norm). For Mould Temperature, in the case of parts where the surface roughness is required we can recommend a temperature of 90°C to 120°C with an optimum at 105°C.
- The processing parameters like processing temperatures are a recommendation and can be adjusted in function of injection machine size, part geometry / design

DISCLAIMER

The information contained in this document is given in good faith based on our current knowledge. It is only an indication and it is in no way binding. This information must on no account be used as a substitutive for necessary prior tests which alone can ensure that a product is suitable for a given use. ANY WARRANTY OF PRODUCT PERFORMANCE, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE IS EXPRESSLY EXCLUDED. Users are responsible for ensuring compliance with local legislation and for obtaining the necessary certifications and authorizations. Users are requested to check that they are in possession of the latest version of this document, and Solvay is at their disposal to supply any additional information.



SAFETY INFORMATION

Detailed information regarding safety are available on the safety data sheet (SDS). SDS is sent with the first material order or available by contacting our customer services

REGULATIONS COMPLIANCE

This product is not intended to be used for the following regulated market: food contact, drinking water, toys, cosmetics or medical devices.

This grade complies with RoHS directive 2002/95/EC as amended.

Grades produced or imported in Europe comply with REACH directive 1907/2006/EC as amended.

CUSTOMER SERVICES

Our customer services are not only concerned with manufacturing and supply of Engineering Plastics products. We are available to assist our customers in finding technical solutions that meet their requirements. Specific support is in particular offered on:


- Material selection
- Material testing
- Parts design advice, training for design engineers
- Part testing
- Design simulation
- Processing through different technologies
- Assembly and post-processing technology expertise
- Parts optimization through Computer Aided Design

You can find more information on Solvay Product range on our internet product finder at the following address:
<http://www.technyl.com>



MULTIPOINT DATA

Isothermal Stress vs. Strain (ISO 11403-1)

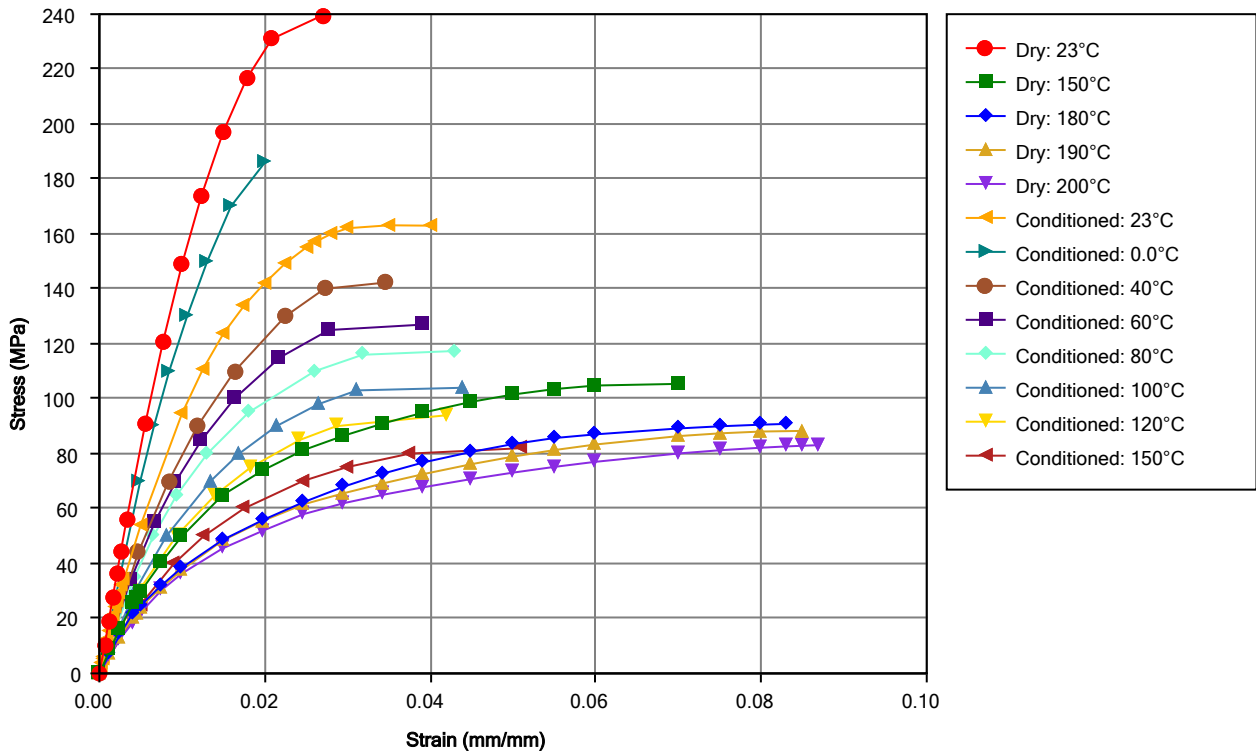

Notes

Typical properties: these are not to be construed as specifications.